


MULTI FUNCTION INSTALLATION TESTER KEW 6516 / 6516BT

*A lot of Testing Power in the hands of
Electrical Installation Professionals!*

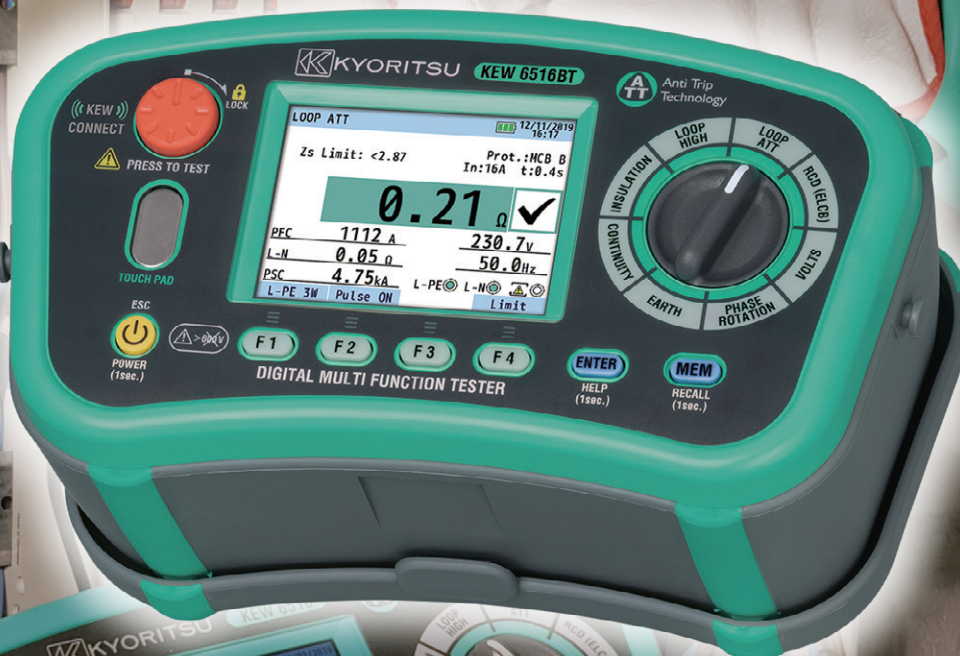

Insulation
100/250/500/1000V

Loop
2/20/200/2000Ω

RCD
6/10/30/100/300/500/1000mA

PSC
2000A/20kA

PFC
2000A/20kA 2000A/50kA

Earth
20/200/2000Ω

AC V
300/600V

Continuity
20/200/2000Ω

Phase rotation

Frequency

SPD (Varistor)

PAT

Communication interface

USB



KEW Report


Bluetooth®



**KEW Smart
Advanced**


Operation in 3 simple steps

- ✔ Set the rotary dial to your testing range.
- ✔ Connect the instrument to the installation under test.
- ✔ Press the test button.

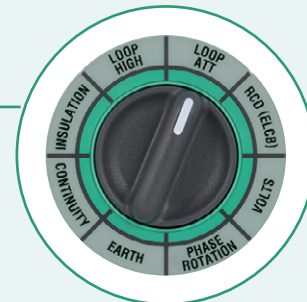

Hands free testing

By remote probe or using the Lockdown function of the test button.

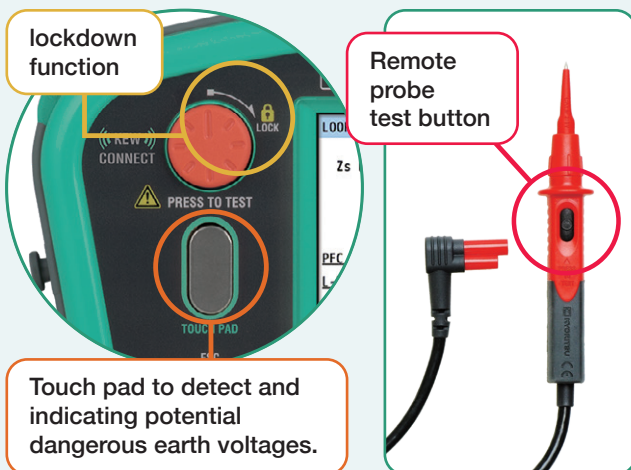


Large LCD

All the test data is shown in one large colored screen.



Anti-Trip Technology (with 2 & 3 wires)

For no trip LOOP L-PE testing on all RCDs.
 With 3 wire (L, N, PE), to get the best accuracy readings.
 With 2 wire only, very useful in case of no Neutral (i.e. 3-phase motor lines).

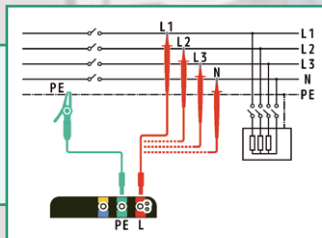


HELP Key

HELP function will show how to connect the instrument according to the function selected.

0.001 resolution

Thanks to high test current of 25A, the Loop Impedance Phase to Earth is measured with high resolution of 0.001 ohm. This can be useful when testing in the main switchboard closer to the transformer.

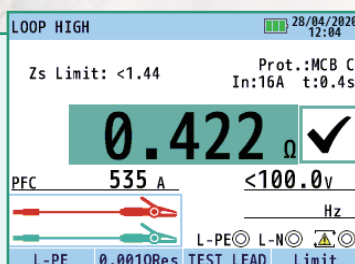

Loop test from a wall socket



Continuity check of equipotential bonding

Testing Power in the hands of Electrical Installation Professionals!

Wide variety of RCDs can be tested

Type AC, A, F, B (General & Selective) EV and Variable RCDs. Single and Auto test, Ramp test and Contact voltage.

RCD		28/04/2020 11:57	
0° (+)	180°	TYPE AC	UL 50V
x1/2	ms	TYPE A	
x1	ms	TYPE A	
x5	ms	TYPE B	00.0V
		TYPE B	
		TYPE F	Hz
		TYPE F	
AUTO	30mA	TYPE EV	

RCD		27/05/2020 18:15	
0°	180°	UL 50V	
x1/2	>2000ms	>2000ms	
x1	10.4ms	20.5ms	
x5	8.4ms	18.0ms	230.4V
			50.0Hz
		L-PE	L-N
AUTO	30mA	TYPE AC	


SPD test

SPD (Surge Protection Device) which contains varistor can be tested measuring the tripping voltage without damage it.



PAT test

PAT test (PAT = Portable Appliance Tester) It is possible to check the insulation resistance and earth bond continuity of portable appliances for class I and II.

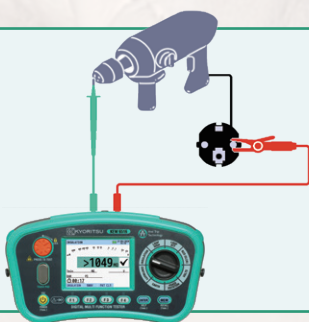

Connectivity

KEW 6516 can download the test data by connecting the USB adapter (MODEL 8212-USB) and then print complete Test Reports by a PC. While KEW 6516BT can transfer the test data to a Tablet or Smartphone via Bluetooth®. Such test data can be saved, shared and sent by email. The USB adapter can also be ordered as an option.



Zs/Ra Limit

LOOP ATT.		12/11/2019 16:17	
Zs Limit: <2.87	Prot.: MCB B	In: 16A	t: 0.4s
0.21 Ω ✓			
PFC	1112 A	230.7V	
L-N	0.05 Ω	50.0Hz	
PSC	4.75kA	L-PE	L-N
L-PE 3W	Pulse ON	Limit	

The verification of safety requirement on an electrical installation is simplified by using Zs/Ra Limit function. This function will automatically check if the measured loop impedance for TN (or earth loop for TT) is low enough to trip (disconnect) the MCB / Fuse / RCD giving the result of PASS(✓) or FAIL(x) on the display.

KEW 6516 and KEW 6516BT come complete with everything you need for testing an electrical installation

Accessories



Optional accessories

<p>MODEL7272 Precision measurement cord set 2 cord reels with test leads, 2 spikes, an earth test lead, a carrying case.</p>	<p>MODEL 8017A Extension prod long</p>	<p>MODEL 8259 Adapter for measurement terminal [red, yellow, green/1set]</p>	<p>KEW 8601 EVSE ADAPTER TYPE1 plug</p>	<p>KEW 8602 EVSE ADAPTER TYPE2 plug</p>
---	---	---	--	--

MFT and EVSE ADAPTER Kits
KEW 6516-EV2 : KEW 6516×1, KEW 8602×1
KEW 6516BT-EV2 : KEW 6516BT×1, KEW 8602×1

MULTI FUNCTION TESTER KEW 6516 / 6516BT Specification

Insulation resistance				SPD(Varistor)		
Test voltage	100V	250V	500V	1000V	1000V max.	
Measuring ranges	2.000/20.00/200.0MΩ (Auto-ranging)		20.00/200.0/1000MΩ (Auto-ranging)	20.00/200.0/2000MΩ (Auto-ranging)	0 to 1049V(goes up by 1V)	
Accuracy	±2%rdg±6dgt (2.000/20.00MΩ) ±5%rdg±6dgt (200.0MΩ)		±2%rdg±6dgt (20.00/200.0MΩ) ±5%rdg±6dgt (1000MΩ)	±2%rdg±6dgt (20.00/200.0MΩ) ±5%rdg±6dgt (2000MΩ)	±5%rdg±5dgt	
Rated current	1.0 to 1.2mA @0.1MΩ	1.0 to 1.2mA @0.25MΩ	1.0 to 1.2mA @0.5MΩ	1.0 to 1.2mA @1MΩ	-	
Short circuit current	1.5mA max.				-	
Loop impedance						
Function	LOOP ATT L-PE/L-N(3-wire) L-PE(2-wire)		LOOP HIGH L-PE(0.01ΩRes)	L-PE(0.001ΩRes)	L-N/L-L 48 to 500V(50/60Hz)	
Rated voltage	100 to 260V(50/60Hz)		48 to 260V(50/60Hz)	100 to 260V(50/60Hz)	48 to 500V(50/60Hz)	
Impedance range	20.00/200.0/2000Ω (Auto-ranging)		2.000Ω		20.00Ω	
Accuracy	±3%rdg±6dgt		±3%rdg±10dgt	±3%rdg±4dgt	±3%rdg±25mΩ	
Nominal test current at 0Ω external loop: Magnitude/Duration at 230V	L-N:6A/60ms N-PE:10mA EV mode*1 Normal I N-PE:6mA Low I N-PE:4mA	L-PE:15mA	200:6A/20ms 2000:0.5A/20ms 20000:15mA/500ms	25A/20ms	6A/20ms	
PSC/PFC						
Range	2000A/20kA(L-N(PSC)/L-PE(PFC))		2000A/20kA(PFC)	2000A/50kA(PFC)	2000A/20kA(PSC)	
Accuracy	PSC/PFC accuracy is determined by measured loop impedance specification and measured voltage specification					
RCD						
Rated voltage	100 to 260V(50/60Hz)					
Function	x1/2, x1, x5, Ramp, Auto, Uc 6/10/30/100/300/500/1000mA/variable					
RCD type	AC(G/S)		A(G/S)	F(G/S)	B(G/S)	EV
Trip current setting	x1/2, x1, Uc	10/30/100/300/500/1000mA(G) 10/30/100/300/500mA(S)		10/30/100/300/500mA	10/30/100/300mA	6mA(x1 only)
	x5	10/30/100mA			10/30mA	-
	Ramp	10/30/100/300/500mA			10/30/100/300mA	6mA
Accuracy	Trip current	x1/2	-8 to -2%	-10 to 0%		-
		x1	+2 to +8%	0 to +10%		-
		x5	+2 to +8%	0 to +10%		-
		Ramp	-4 to +4%	-10 to +10%		-
	Trip time	x1/2	2000ms(G/S):±1%rdg±2ms			-
	x1	550ms(G):±1%rdg±2ms, 1000ms(S):±1%rdg±2ms			10.5s:±1%±2ms	
	x5	410ms(G/S):±1%rdg±2ms			-	
Continuity						
Range	20.00/200.0/2000Ω (Auto-ranging)					
Open circuit voltage (DC)	7 to 14V					
Measuring current	200mA	200mA or more(2Ω or less)				
	15mA	15mA±3mA(short-circuit)				
Accuracy	±2%rdg±8dgt					
Phase Rotation						
Rated voltage	48 to 600V(45 to 65Hz)					
Remarks	Correct phase sequence are displayed with "1, 2, 3" and arrow mark. Reverse phase sequence are displayed with "3, 2, 1" and arrow mark.					
General						
Applicable standards	IEC 61010-1 CAT IV 300V / CAT III 600V Pollution degree 2, IEC 61010-2-034, IEC 61557-1,2,3,4,5,6,7,10, IEC 60529(IP40), IEC 61326(EMC)					
Communication interface	USB, Bluetooth® 5.0*2					
Power source	LR6(AA)(1.5V) × 8					
Dimension	136(L) × 235(W) × 114(D)mm					
Weight	1350g (including batteries)					
Accessories	Mains test lead*3, 7281(Test leads with remote control switch), 7246(Distribution board test lead), 7228A(Earth resistance test leads), 8041(Auxiliary earth spikes[2spikes/1set]) 8212-USB(USB adapter for 6516), 8923(Fuse[0.5A/600V]) × 1 (included), 1 (spare), 9084(Soft case), 9142(Carrying case), 9151(Shoulder strap), 9199(Shoulder pad), Batteries, Instruction manual					
Optional accessories	8212-USB(USB adapter for 6516BT), 8259(Adapter for measurement terminal), 7272(Precision measurement cord set), 8017A(Extension prod long) 8601(EVSE ADAPTER), 8602(EVSE ADAPTER)					

*1 The following functions have been added to KEW 6516/6516BT main unit firmware version 2.10 or later.

*2 6516BT only

*3 Some countries regulate the compliance with their Radio Law of the products equipped with Bluetooth®. Please confirm it with your distributor before purchasing our products equipped with Bluetooth®.

*4 7187A: British plug, 7218A:(EU)European SCHUKO plug, 7221A(SA) South african plug, 7222A:(AU)Australian plug

Bluetooth® is a trademark or registered trademark of Bluetooth SIG, Inc.

Android is a trademark or registered trademark of Google LLC.

iOS is a trademark or registered trademark of Cisco Technology, Inc. in the United States and other countries.

! Safety Warnings : Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

For inquiries or orders :



2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan
Phone: +81-3-3723-0131
Fax: +81-3-3723-0152



www.kew-ltd.co.jp